

R-865

Multiple Spring Seal




Mechanical Seal Division
www.uniqueps.co.za

Materials

- Stationary:** - Car / SiC / SiC / TC
Rotary: - Car / SiC / SiC / TC
Elastomer: - NBR / EPDM / Viton / Aflas / FFKM

Working Conditions

- Pressure:** ≤ 30 bar
Speed: ≤ 30 m/s
Temperature: Up to 205°C

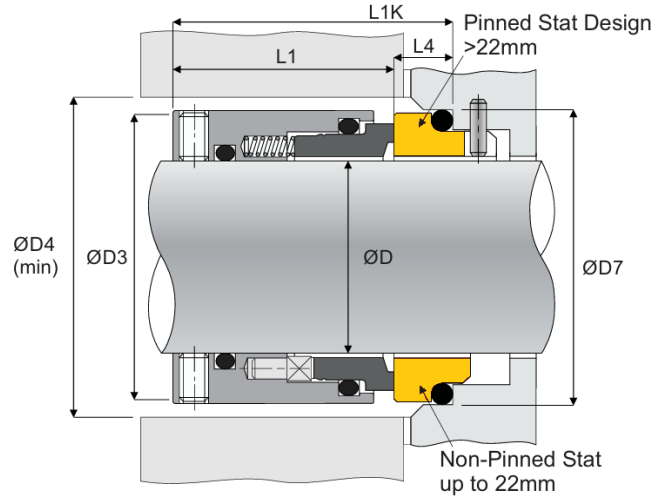

Shaft ØD	ØD3	ØD4 (Min)	L1	L1K	Stationary Seat		Seat Type
					ØD7	L4	
18	32	34	31.5	37.5	33	6	D-SBS
20	34	36	31.5	37.5	35	6	D-SBS
22	36	38	31.5	37.5	37	6	D-SBS
24	38	40	33	40	39	7	D-SBS
25	39	41	33	40	40	7	D-SBS
28	42	44	32.5	42.5	43	10	D-S16
30	44	46	32.5	42.5	45	10	D-S16
32	46	48	32.5	42.5	48	10	D-SDL
33	47	49	32.5	42.5	48	10	D-SDL
35	49	51	32.5	42.5	50	10	D-SDL
38	53	56	34	45	56	11	D-SDL
40	55	58	34	45	58	11	D-SDL
43	58	61	34	45	61	11	D-SDL
45	60	63	34	45	63	11	D-SDL
48	63	66	34	45	66	11	D-SDL
50	66	69	34	47.5	70	13.5	D-SBP
53	69	72	34	47.5	73	13.5	D-SBP
55	71	74	34	47.5	75	13.5	D-SBP
58	76	80	39	52.5	78	13.5	D-SBP
60	78	82	39	52.5	80	13.5	D-SBP
63	81	85	39	52.5	83	13.5	D-SBP
65	83	87	39	52.5	85	13.5	D-SBP
70	88	92	44.7	60	92	15.3	D-SDL
75	93	97	44.7	60	97	15.3	D-SDL
80	103	107	45	60	105	15	D-SBP
85	108	112	45	60	110	15	D-SBP
90	113	117	50	65	115	15	D-SBP
95	118	122	50	65	120	15	D-SBP
100	123	127	50	65	125	15	D-SBP